


RIGHT HAND UNIT

LEFT HAND UNIT

PLAN VIEW

FRONT VIEW

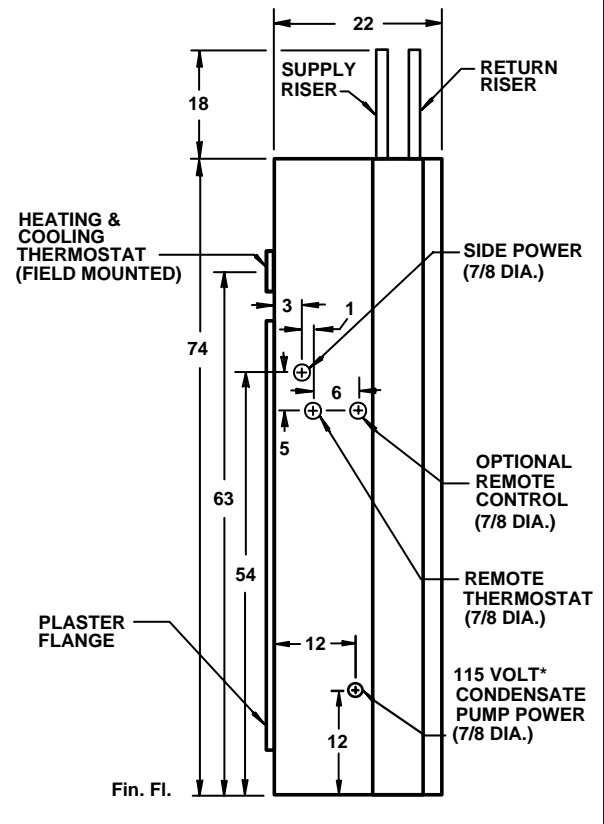

RIGHT SIDE VIEW

*115/1/60 field power connection to condensate pump is required at the time main power connection is made. See Electrical Nameplate Data for heat pump nameplate voltage.

Notes:

1. Cabinet is acoustically and thermally insulated, and is fabricated of continuous galvanized steel, suitable for direct application of "drywall" plaster board.
2. Supply and return risers are type M copper. Riser assemblies include two shut off valves inside the cabinet. Standard units include high-pressure hose kits for connection of the refrigeration chassis. The entire bottom of the unit is a drain pan, for containment of water within the unit.
3. Fan motors are permanent split capacitor (PSC) type.

UNIT NOMINAL CFM	A	MINIMUM SLEEVE SIZE	OPERATING WEIGHT LBS.
1000	52	6 x 8	250
1200	52	6 x 8	280

All dimensions in inches.

WATER SOURCE HEAT PUMPS
THE WHALEN COMPANY
 EASTON, MARYLAND

SERIES VI VERTICAL UNITS
SIDE RISER UNITS
w/ CONDENSATE PUMP
 DRAWING NUMBER 601E-S-K-CP